

BRUNNER ACCUMULATION STOVES




GOF 37x42 for GOT 52/37-ZL

State: 15.04.2013



BRUNNER[®]
made in germany

Dimension sheet | **GOF 37x42**

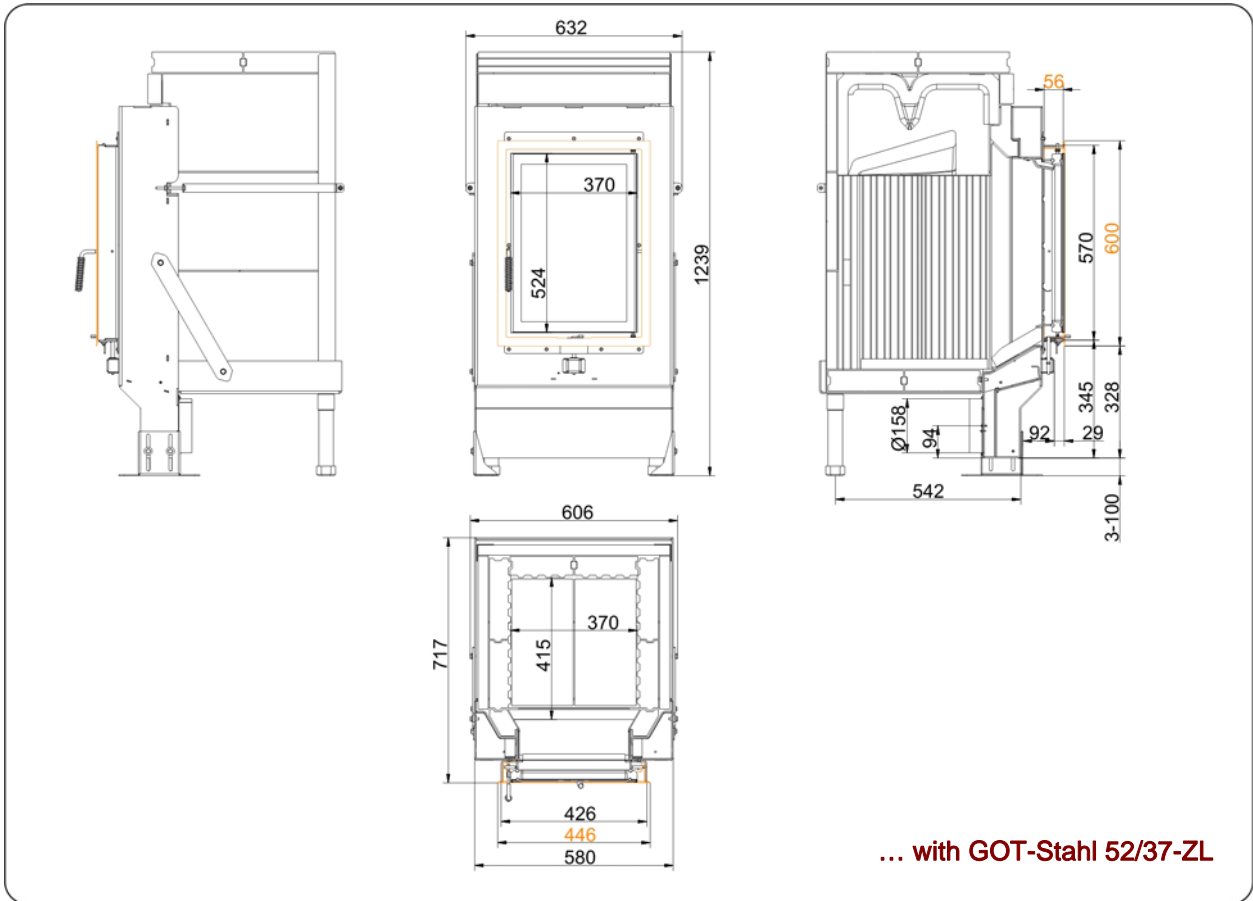

Planning and installation

GOF 37x42 for GOT 52/37-ZL

Tested according to		EN 15250	EN 15250
Values measured at		min. accumulator	max. accumulator
ceramic accumulator ¹⁾	m	4	6
accumulation stones (MSS)	m	3,0; 400	5,0; 650
Suitable for all construction types according to rules		OK	OK
Data for functional demonstration			
Firewood consumption	kg/h	7,3	8,3
Combustion performance	kW	26,5	31,3
Flue gas mass flow	g/s	29	29
Outlet temperature (before heating surface)	°C	630	700
Flue gas temperature after			
ceramic accumulator ¹⁾	°C	180	180
accumulation stones (MSS)	°C	180	150
Necessary supply pressure ²⁾	Pa	13	13
Combustion air consumption	m ³ /h	70	70
Combustion air connection Ø	mm	2 x 160	2 x 160
Heat distribution			
Insert / heating surface	%	35 / 45	35 / 45
Glass (single / double)	%	- / 20	- / 20
Weight			
Fireplace	kg		365
meets requirement limit values for			
Germany / Austria / Switzerland / Norway		1.BImSchV (Stufe 2) / 15a BVG / - / -	

1) Approximate value, must be calculated eventually

2) for GOF without radiators and accumulators

Ulrich Brunner GmbH
Zellhuber Ring 17 -18
D-84307 Eggenfelden
Phone: +49 / (0)87 21 / 7 71-0
Fax: +49 / (0)87 21 / 7 71-100
info@brunner.de | www.brunner.de

The logo for Brunner, featuring the word "BRUNNER" in a bold, sans-serif font. The letters are filled with horizontal lines, giving it a textured appearance. A registered trademark symbol (®) is located at the top right of the logo.

BRUNNER products are offered and sold only by qualified dealers and service centres.
Subject to technical and assortment changes. Errors excepted. (04/13)