

FIREPLACE KIT SYSTEM FROM BRUNNER




BSK 08 mit Stil-Kamin 51/67 mit Kesselaufsatz

State: 16.03.2016




BRUNNER[®]
made in germany.

Dimension sheet | **BSK 08 mit Stil-Kamin 51/67 mit Kesselaufsatz**

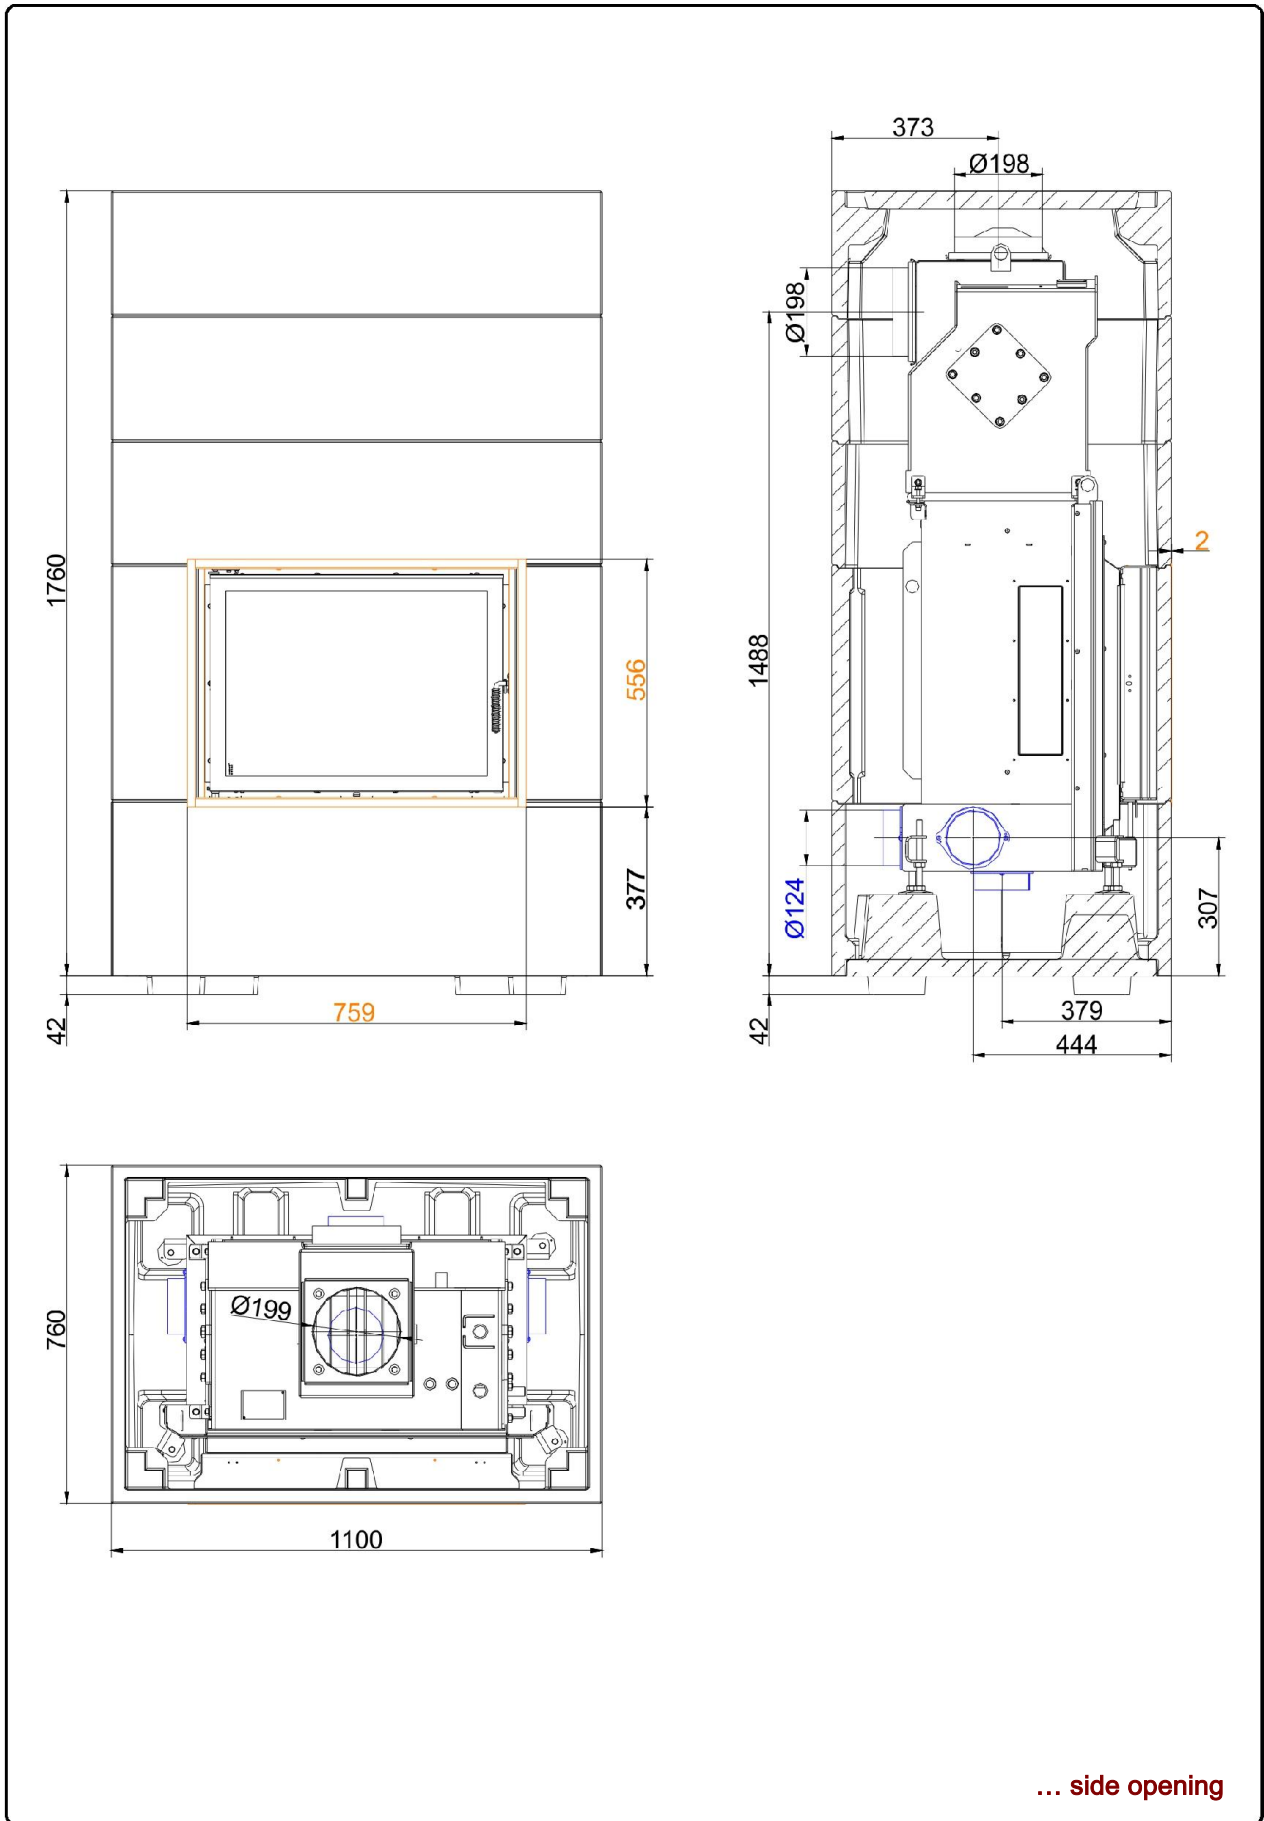


We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
 Frames / front versions are marked colored.

Dimension sheet | **BSK 08 mit Stil-Kamin 51/67 mit Kesselaufsatz**

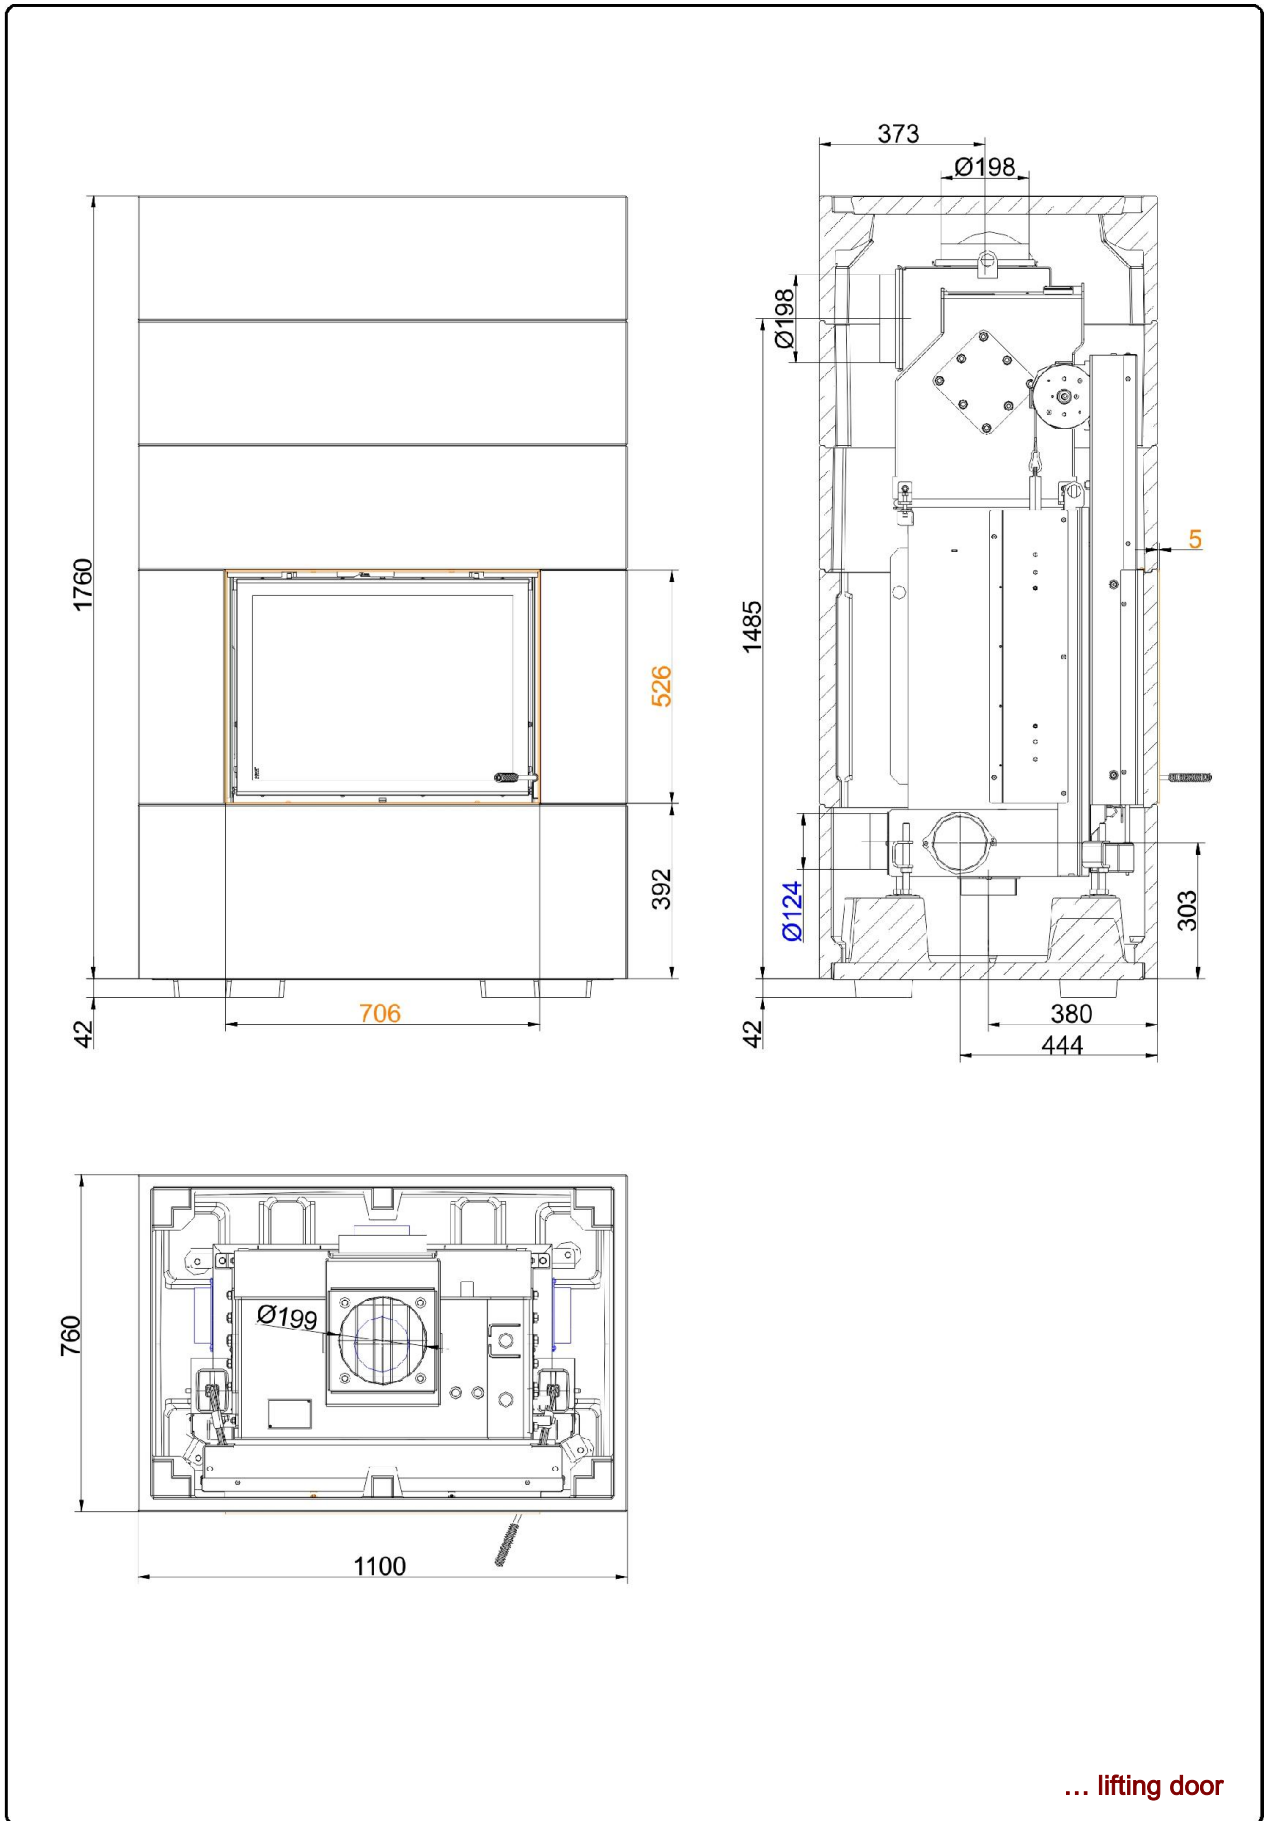


We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

Dimension sheet | **BSK 08 mit Stil-Kamin 51/67 mit Kesselaufsatz**

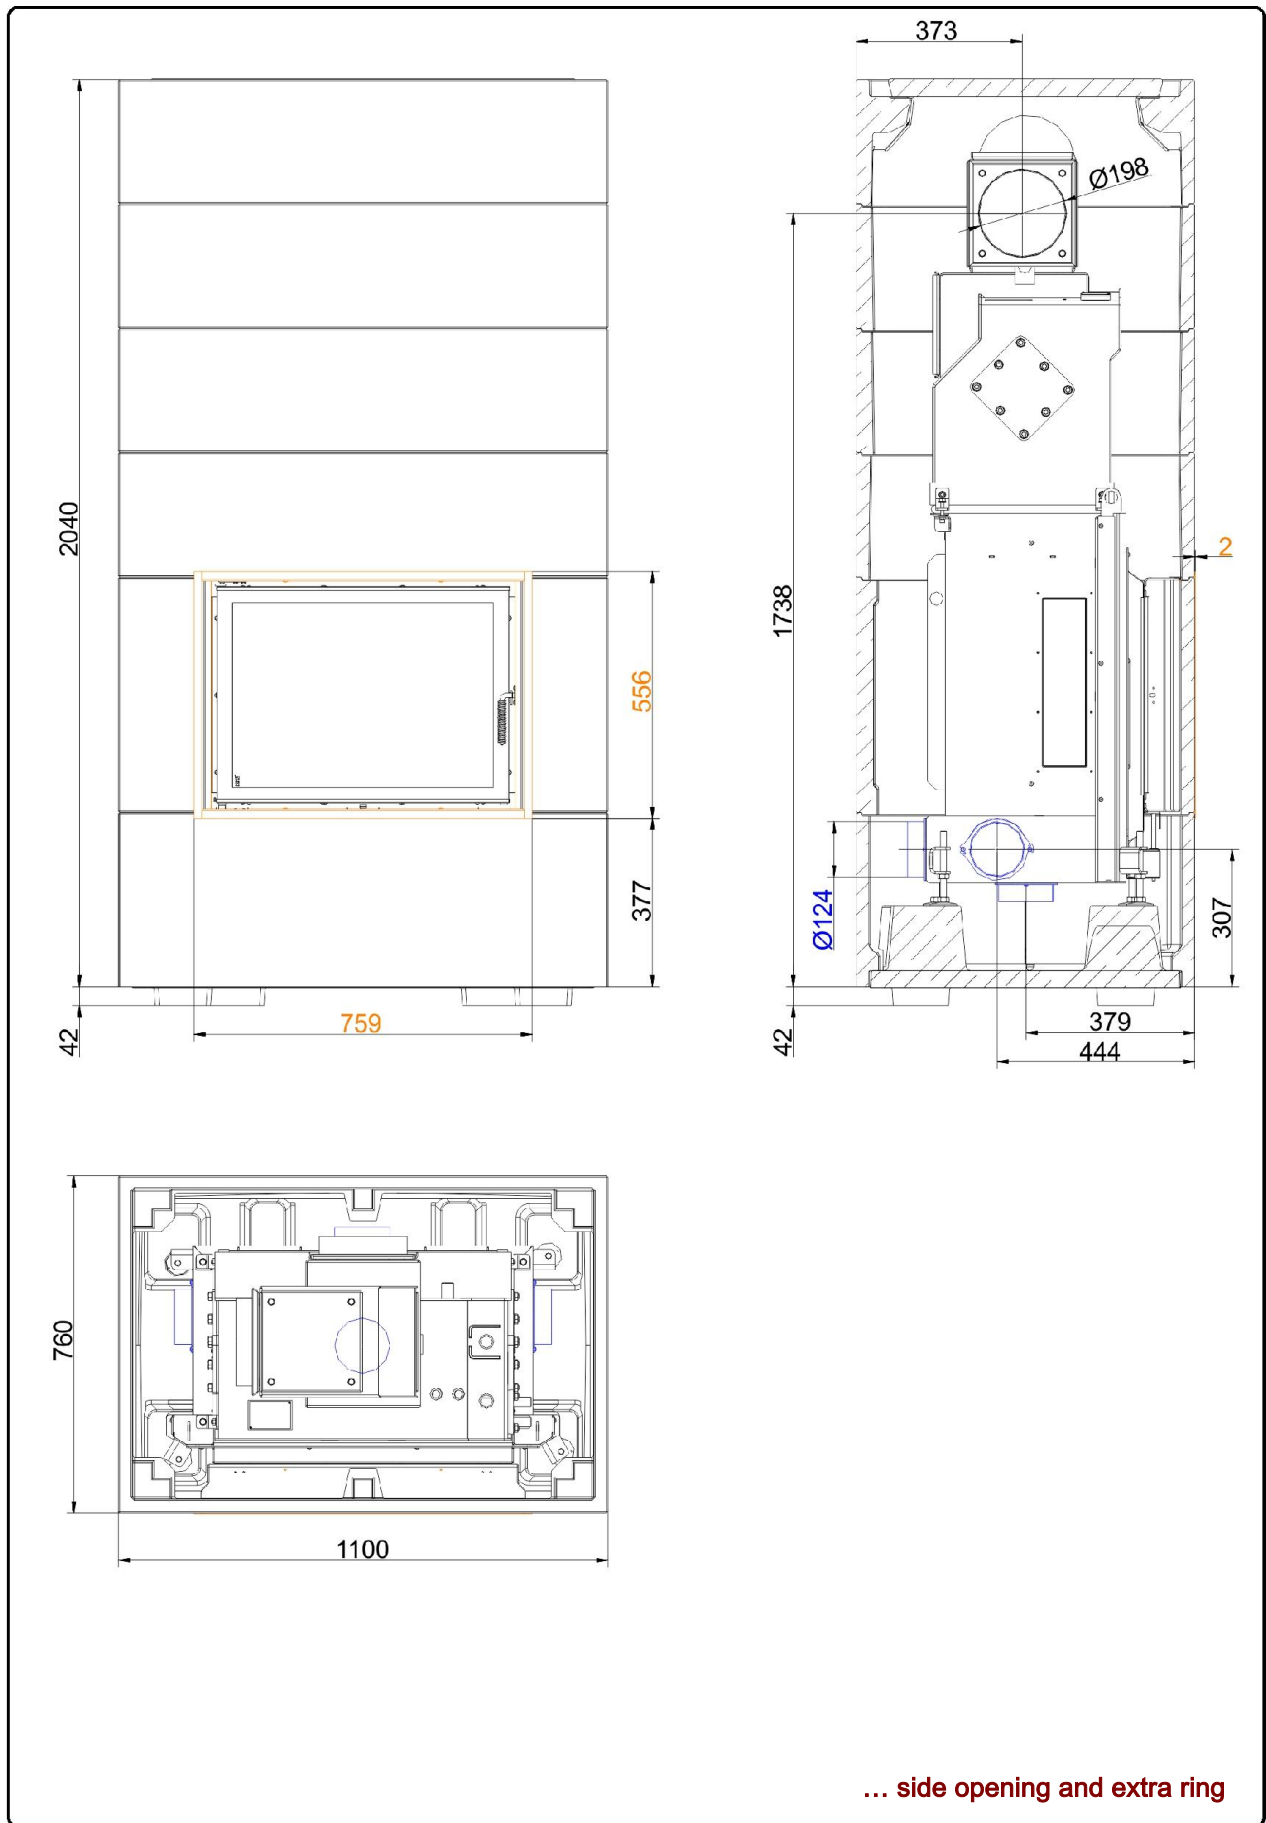

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

Dimension sheet | **BSK 08 mit Stil-Kamin 51/67 mit Kesselaufsatz**

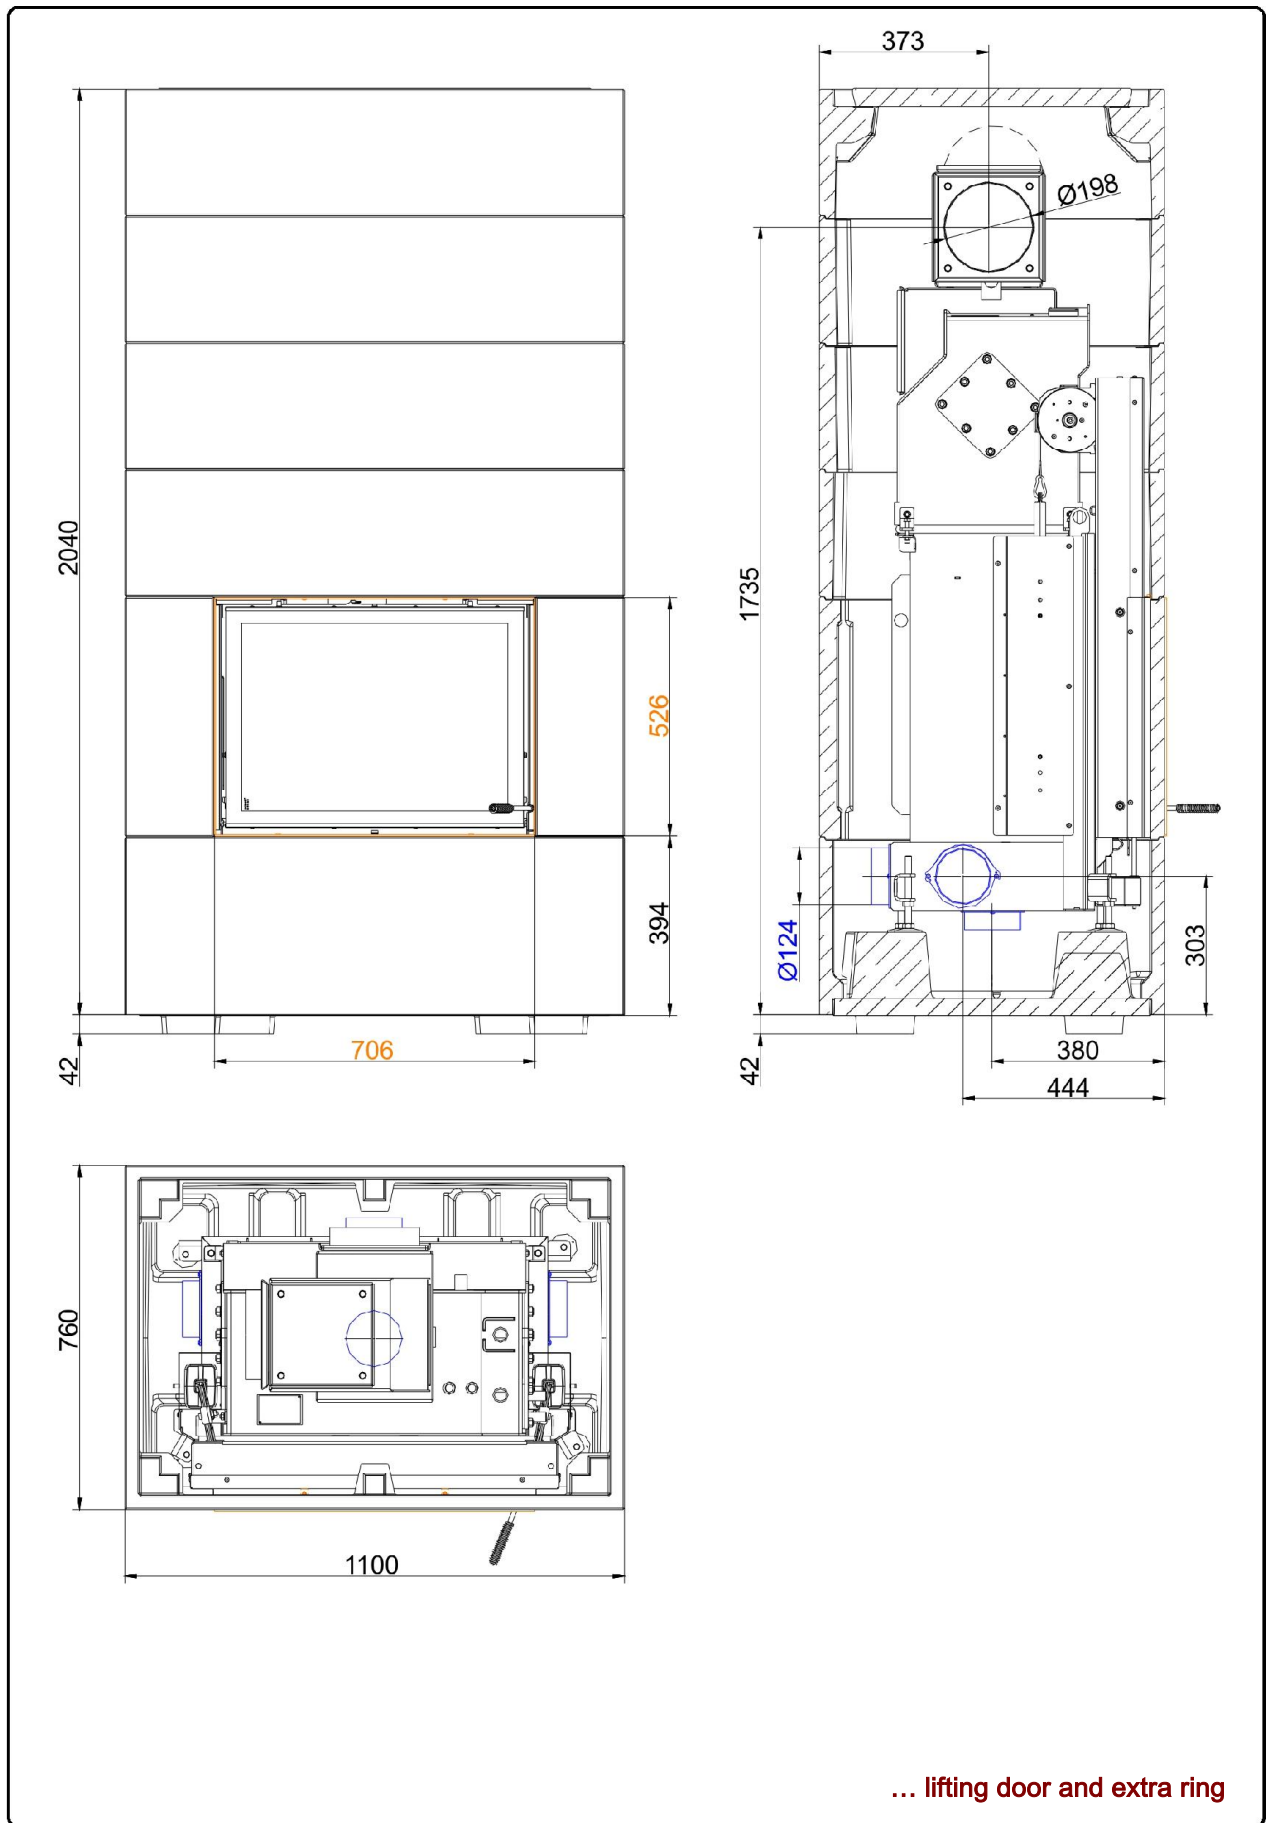

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

Planning and installation

BSK 08 mit Stil-Kamin 51/67 mit Kesselaufsatz

Tested according to

EN 13229

Data for functional demonstration

Rated heat power	kW	13
Firewood consumption	kg/h	4,1
Flue gas mass flow	g/s	15
Flue gas temperature	°C	200
Necessary supply pressure ¹⁾	Pa	15
Combustion air consumption	m ³ /h	40
Combustion air connection Ø	mm	125

Height extension rings

Ground area (width x depth)	mm	1100 x 760
Overall height	mm	1802
Height extension ring	mm	280

Distances

Dist. to adjacent wall in direct contact (with radiation panels inside) ²⁾	cm	0
Dist. to adjacent wall for free-standing design (without radiation panels inside) ²⁾	cm	5
Distance to the ceiling	cm	40

Heat insulation

In ceiling region connection with/without air grate	cm	28 / 20
---	----	---------

Hot air cross section ³⁾

Supply air	cm ²	1110
Warm air	cm ²	900

Weight

Total weight	kg	728 / 772
--------------	----	-----------

meets requirement limit values for:

Germany / Austria / Switzerland / Norway

1.BImSchV (Stufe 2) / 15a BVG (2015) / - / -

1) Throttle flap recommended

2) Distance is valid for adjacent walls. For protected walls, a brick lining is required

3) Existing supply air opening

Ulrich Brunner GmbH
Zellhuber Ring 17 -18
D-84307 Eggenfelden
Telefon: +49 / (0)87 21 / 7 71-0
Telefax: +49 / (0)87 21 / 7 71-100
info@brunner.eu | www.brunner.eu

The logo for Brunner, featuring the word "BRUNNER" in a bold, stylized font with horizontal lines through the letters. A registered trademark symbol (®) is located at the top right of the logo.