


# FIREPLACE KIT SYSTEM FROM BRUNNER




## BSO 04 mit HKD 2.2k SK

State: 12.11.2015

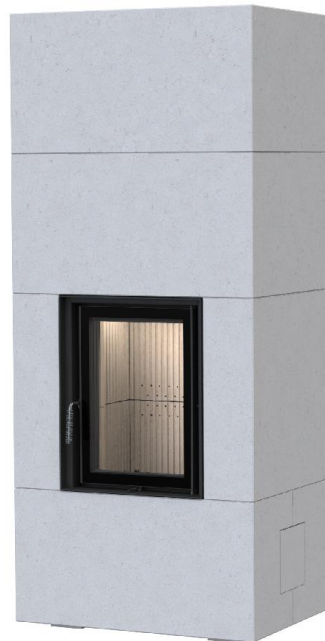

**BRUNNER**<sup>®</sup>  
*made in germany.*

Dimension sheet | **BSO 04 mit HKD 2.2k SK**

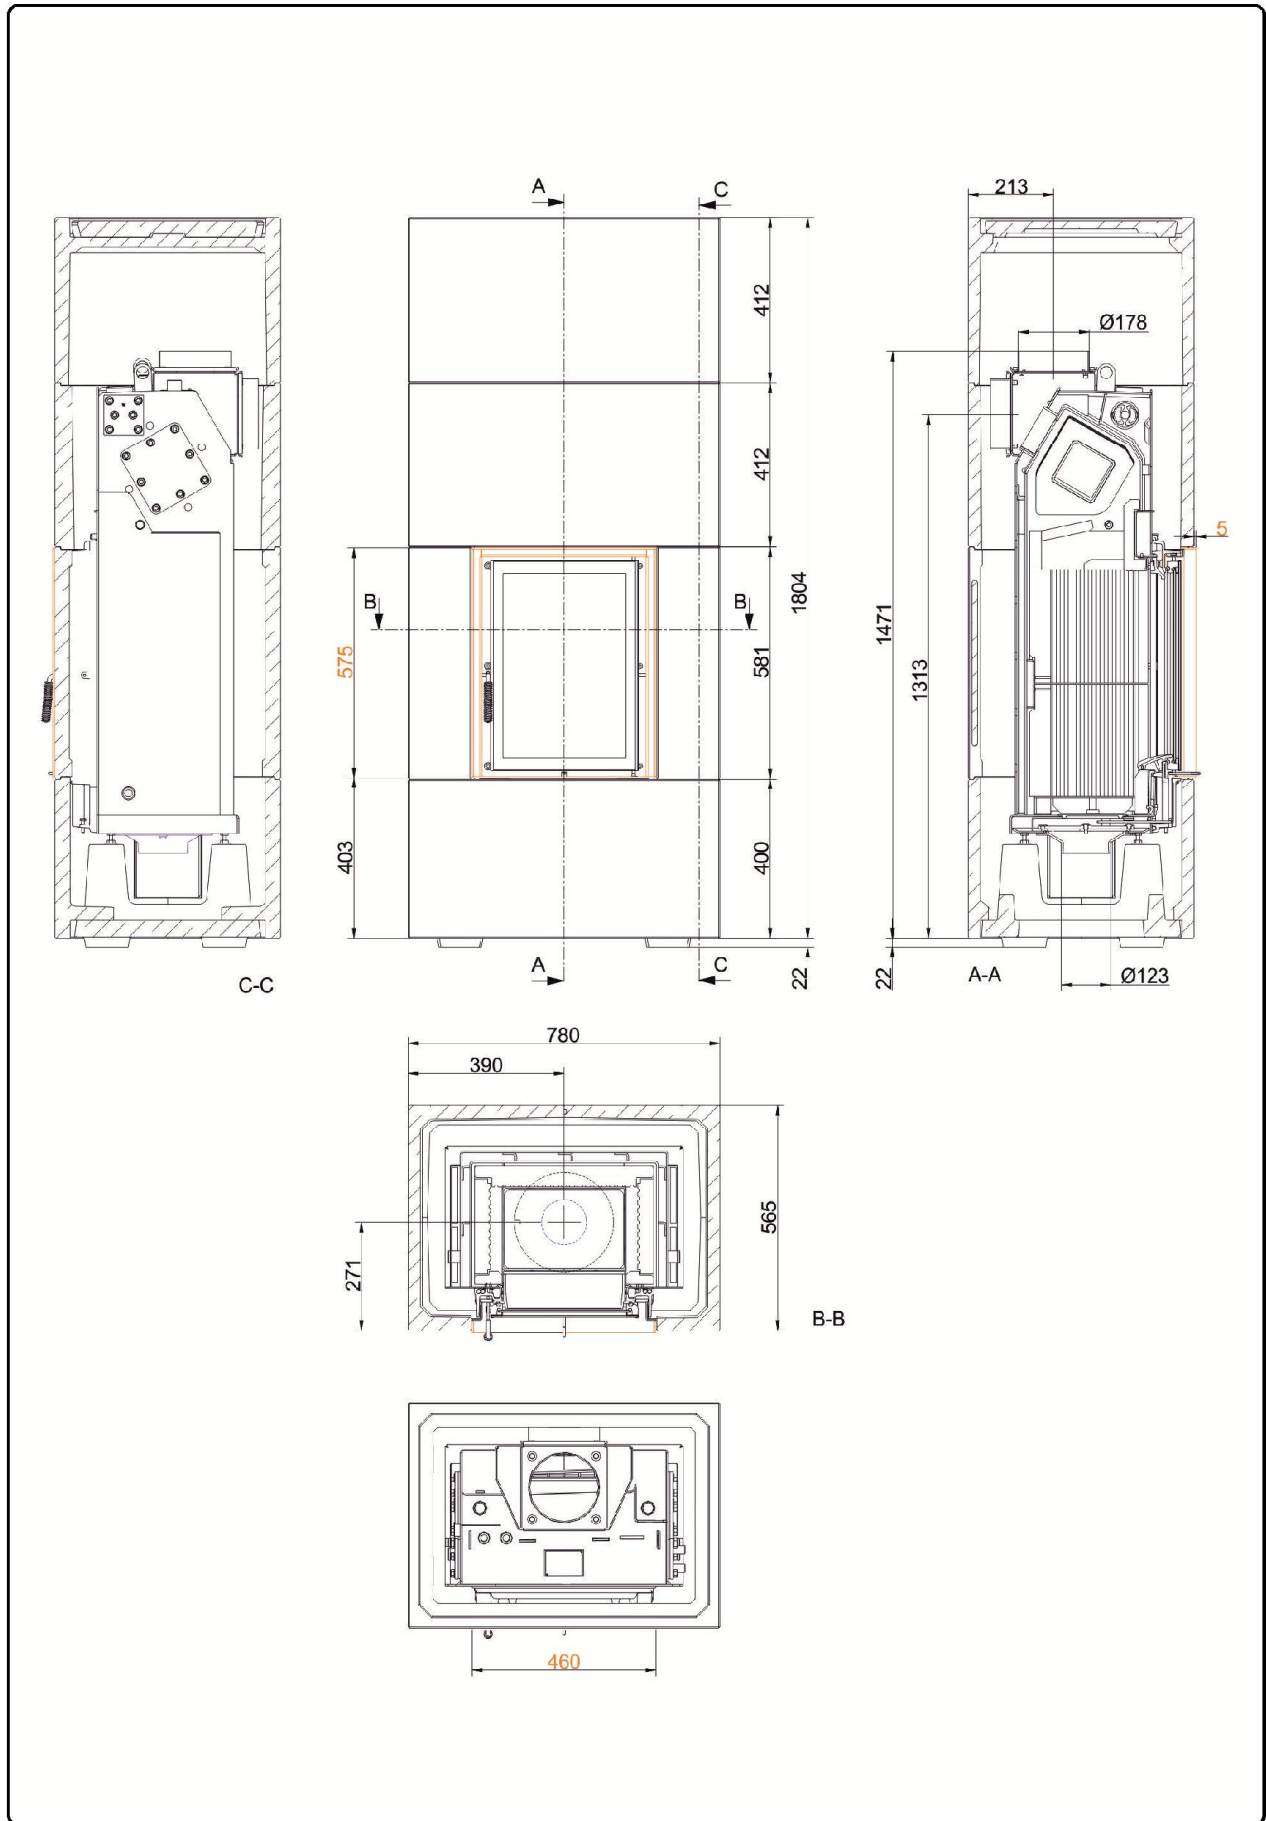

We suggest for CAD planing Palette CAD. Permanent updated drawings: [www.brunner.de](http://www.brunner.de)  
 Frames / front versions are marked colored.

# Planning and installation

## BSO 04 mit HKD 2.2k SK

Tested according to

EN 13229

### Data for functional demonstration

Rated heat power	kW	8
Firewood consumption	kg/h	2,5
Flue gas mass flow	g/s	9
Flue gas temperature	°C	210
Necessary supply pressure <sup>1)</sup>	Pa	12
Combustion air consumption	m <sup>3</sup> /h	25
Combustion air connection Ø	mm	125

### Height extension rings

Ground area (width x depth)	mm	780 x 565
Overall height	mm	1826
Height extension ring	mm	-

### Distances

Dist. to adjacent wall in direct contact (with radiation panels inside) <sup>2)</sup>	cm	0
Dist. to adjacent wall for free-standing design (without radiation panels inside) <sup>2)</sup>	cm	5
Distance to the ceiling	cm	40

### Heat insulation

In ceiling region connection with/without air grate	cm	4 / 4
---	----	-------

### Hot air cross section <sup>3)</sup>

Supply air	cm <sup>2</sup>	318
Warm air	cm <sup>2</sup>	592

### Weight

Total weight	kg	573
--------------	----	-----

### meets requirement limit values for:

Germany / Austria / Switzerland / Norway

1.BImSchV (Stufe 2) / 15a BVG (2015) / LRV / -

1) Throttle flap recommended

2) Distance is valid for adjacent walls. For protected walls, a brick lining is required

3) Existing supply air opening

Ulrich Brunner GmbH  
Zellhuber Ring 17 -18  
D-84307 Eggenfelden  
Telefon: +49 / (0)87 21 / 7 71-0  
Telefax: +49 / (0)87 21 / 7 71-100  
info@brunner.eu | www.brunner.eu

The logo for Brunner, featuring the word "BRUNNER" in a bold, black, sans-serif font. The letters are composed of horizontal lines, giving it a textured, industrial appearance. A registered trademark symbol (®) is located at the top right of the logo.